


SERIES

PRIMEGEN






POWER TO MOVE

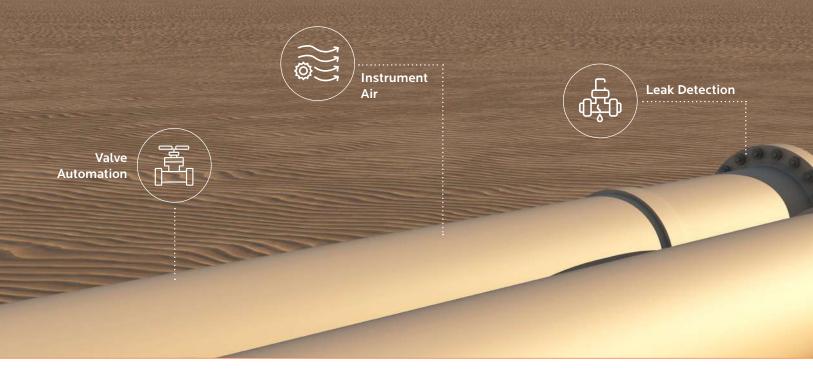




The **M5** Remote Power Generator provides up to 5kW of electrical power and up to 10kW of heat for glycol heat trace applications.

With a 10,000 hour service interval, the **M-Series** is a reliable, low-maintenance source of AC and DC electrical power for applications where regular utilities are unavailable or unreliable.

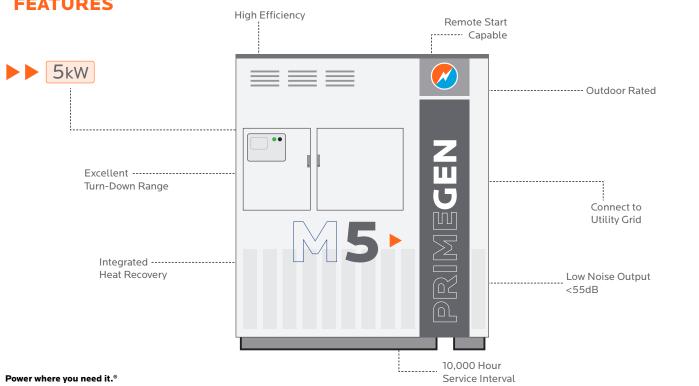


FEATURES

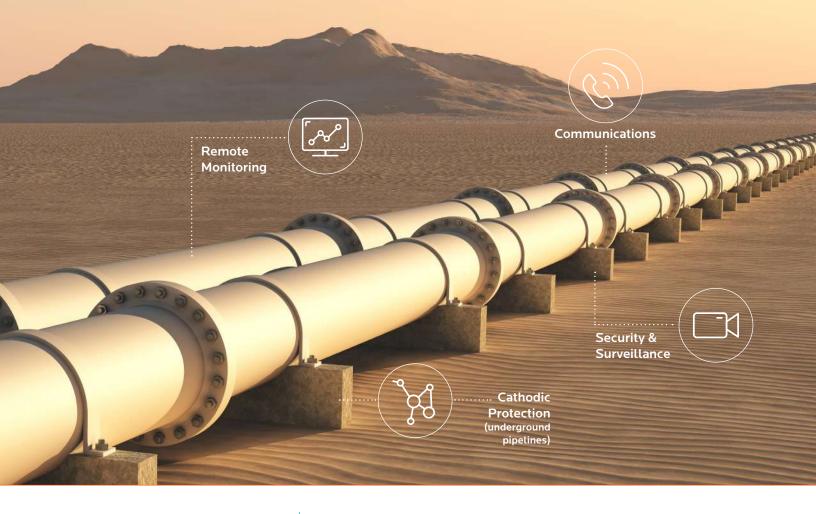



Provides up to 1.5kW of AC and DC electrical power and up to 3.7kW of heat for glycol heat trace applications.

The compact footprint allows for the M1.5 to easily accommodate existing sites. Low noise and vibration, along with remote start and monitoring options make the M-Series the perfect solution for remote off-grid power.

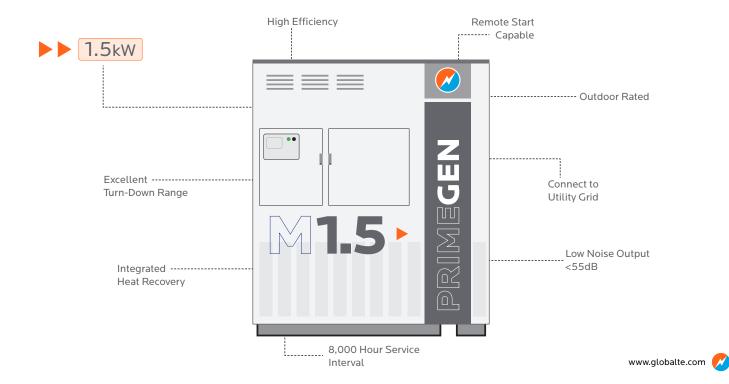

POWER TO PROTECT

Power where you need it.®

Anywhere. Anytime. Any place.

As one of the safest and most reliable ways to move product, pipelines require dependable and efficient power to support oil and gas pipeline operations.

The **M-Series** line of generators is built to operate within the harshest environments on Earth. Backed by Global Power Technologies' 40+ years' experience in the design and manufacture of remote, off-grid power generation products, the **M-Series** offers power from 1.5kW to 5kW and can be combined with solar for the ultimate hybrid power solution.

REMOTE

the state water and the second to the second of the second



8,000–10,000 Hour Service Interval



Low Noise (<55db) Low Vibration



Safe & Secure Design

ſ		
	γ	
	Д	
ų		

Flexible Fuel Options



Full Hybrid Options Available



High Efficiency Generator

THE OPTIONS



Battery Systems





Solar Hybrid



Heated/Cooled Cabinet







CATHODIC PROTECTION


THE DATA

M5 Generator	Specifications			
	POWER	Up to 5.0 kW	120/240 VAC	12/24/48 VDC (optional)
	WEIGHT	2300 lbs. (1043 kg.)		
	SIZE	48"W x 49"D x 77"H		
	FUEL CONSUMPTION	21~43 m³/day	750~1510 ft³/day	Natural Gas
		32~62 L/day	8.5~17 gal/day	Propane
	CERTIFICATIONS	CSA SPE-1000		
	NOISE OUTPUT (dB)	54 dB (A)		

M1.5 Generator	Specifications			
	POWER	Up to 1.5 kW	120 VAC (240 optional)	12/24/48 VDC (optional)
	WEIGHT	1000 lbs. (454 kg.)		
	SIZE	46"W x 43"D x 71"H		
	FUEL CONSUMPTION	6.6~13.5 m³/day	232~475 ft³/day	Natural Gas
		11~22 L/day	2.8~5.7 gal/day	Propane
	CERTIFICATIONS	CSA SPE-1000		
	NOISE OUTPUT (dB)	54 dB (A)		

Power where you need it.®

THE NUMBERS

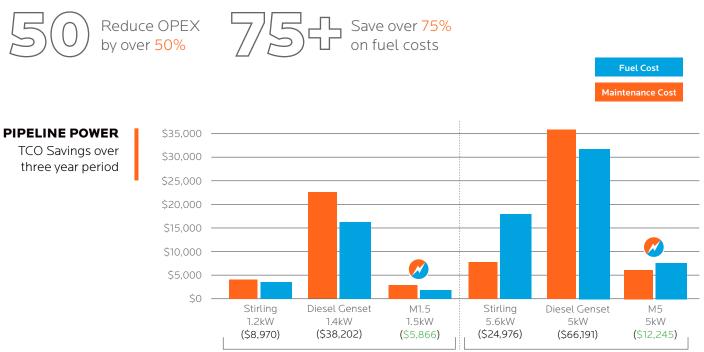

1.5kW RANGE

5kW RANGE



99.95% Availability

The M-Series offers reliable, uninterrupted and efficient power for any application where power is unavailable or unreliable.



4 Hour Service Time

Save time and money. Easily maintainable in approx four hours, just once every 8,000–10,000 hours




75% More Efficient

Consumes up to 50% less fuel than competitive technologies and over 75% less fuel when combined with solar.









Power where you need it.®

www.globalte.com

ARGENTINA CORPOREX S.A. Celular/ WhatsApp: 54911 3306 5761 / 5771 8608 ventas@corporex.com.ar